5 KEY WIRELESS WALL SWITCH

Description:

This wireless switch is part of a smartphone-controlled mesh network for lighting control. It can be used as a wall switch or you can use it as a handheld remote to control compatible devices. As part of a smartphone-controlled mesh network, you can dim the lights or use up to three lighting scenes that are programmable from the smartphone APP. Each device has its own address for sending, receiving, and sharing control commands through a wireless network. Expandability is easy with each device passing information to the next, thus expanding the reach and control throughout the network. Admin or guest access can be shared by QR code.
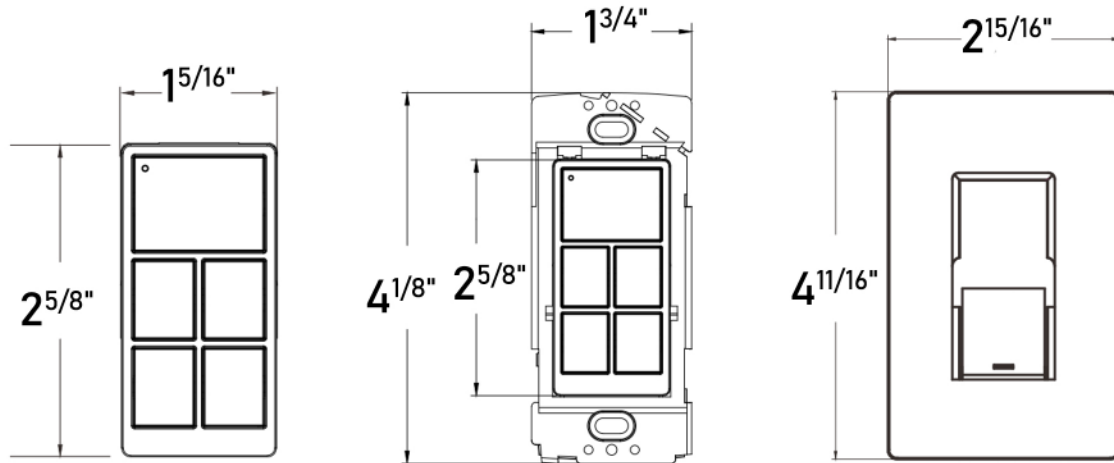
Features:

• SKU: CONT-KEL-SWITCH-WP1025

• Powered by two CR2032 batteries for reliable wireless operation.

• Features a low power indicator that flashes a red light when the battery is running low and any button is pressed.

• Uses Bluetooth 4.2 technology for reliable and secure wireless communication.

• Easy to use programming and commissioning process done through App.

• Smartphone App is available for iOS and Android.

• 5-button design to switch lights on/off, dim lights, and control up to three scenes.

• Does not require any wiring, making it a versatile solution for various settings.

• Easy to be installed as a surface-mounted or recessed wall switch, or used as a desk or handheld remote for flexibility.

• Works independently without requiring a separate gateway device.

• Compatible with our Smart Network Lighting Controls.
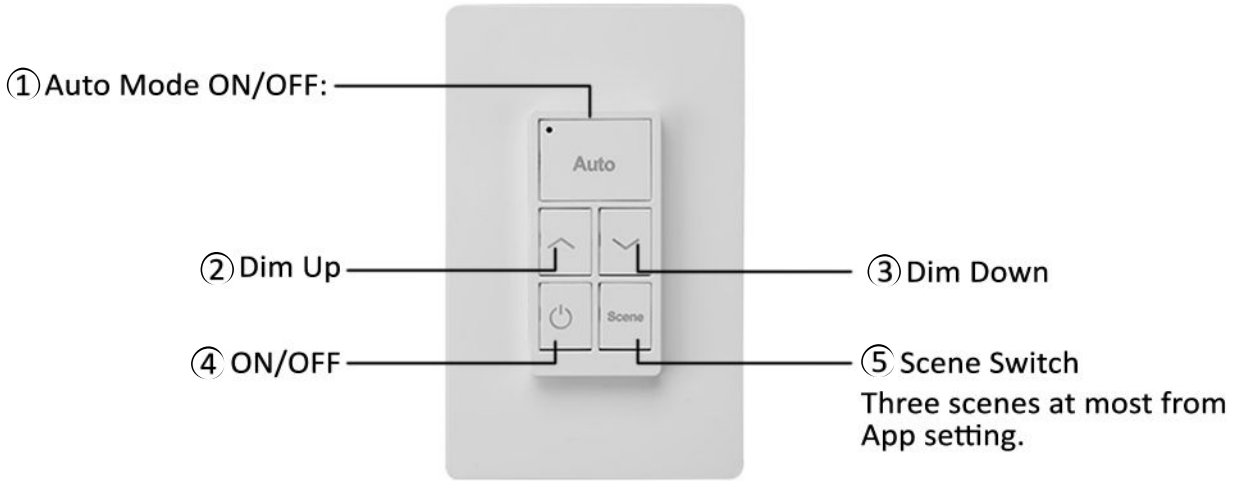
• No internet is required.

Technical Specifications:

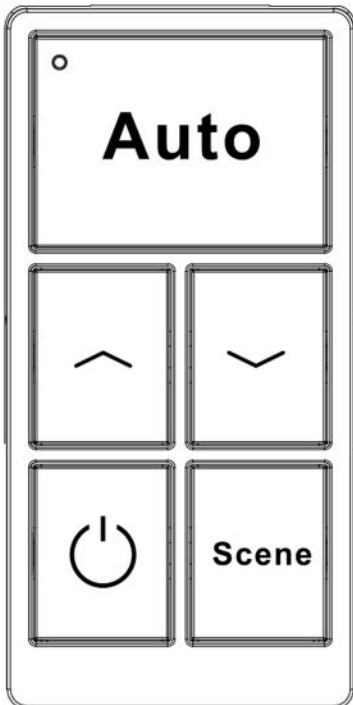|	
Input Voltage	3V DC
Control Distance	100ft. Max
Radio Frequency	2.4GHz±75MHz
Bluetooth Version	4.2
Housing Material	UL 94-V0
Operating Temperature	-0.4°F to 122°F (-18°C to 50°C)
Storage Temperature	-32°F to 86°F (0°C to 30°C)
IP Rating	IP20 - Indoor Use Only
Color	White
Warranty	5 Years

Dimension:

Wiring:

① Auto Mode ON/OFF:

② Dim Up

③ Dim Down

④ ON/OFF

⑤ Scene Switch
Three scenes at most from App setting.

Marking:

Bluetooth Wireless Wall Switch
Supply Voltage:3V (2PCS CR2032 battery)
Flame Rating:UL 94 V-0
Working Humidity: 55±20%RH
Working Temperature: -0.4ºF to 122ºF
(-18ºC to 50ºC)
Net Weight: 4.3g(without battery)

RoHS COMPLIANT

Install Guide

FCC ✱ Bluetooth
FCC ID:2A26YLTKTVT2021

Accessories:
Related Smart Network Lighting Controls:

7Key - 4 Scene Light Switch
SKU: CONT-KEL-SWITCH-WP1017S

Wireless Fixture Control
SKU: CONT-KEL-PPA102S

PIR Occupancy/Daylight
Harvesting Sensor
SKU: CONT-KEL-OCS-IFS105

High Bay PIR Occupancy/
Daylight Harvest Sensor
SKU: CONT-KEL-HBY-SNR-EFS106

App Download: