BACK-LIT LED PANEL

Features:

- Power Tunable 20W/25W/25W/30W/35W/40W/45W/50W
- Super Bright LEDs 130 lumens per watt
- CCT Tunable 3000K/3500K/4000K/5000K
- AC120-277V and AC120-347V
- 0-10V dimmable
- 80% Energy Savings comparted to traditional troffer
- Non-flicker/ No dark spots

c UL US
E359489

5 year warranty

Power & CCT Back-lit LED Panel Light Series:

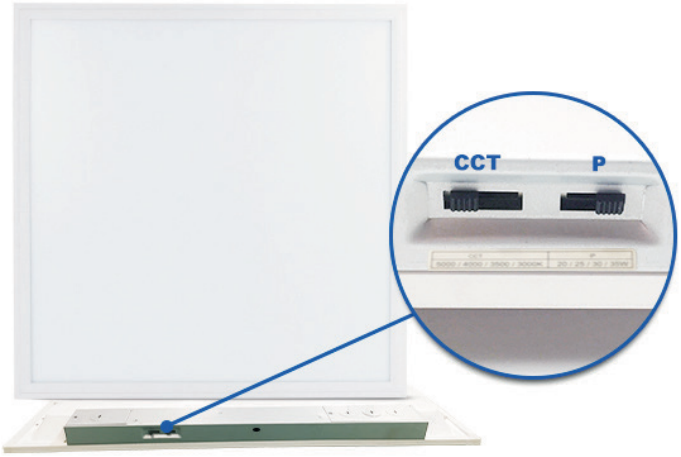

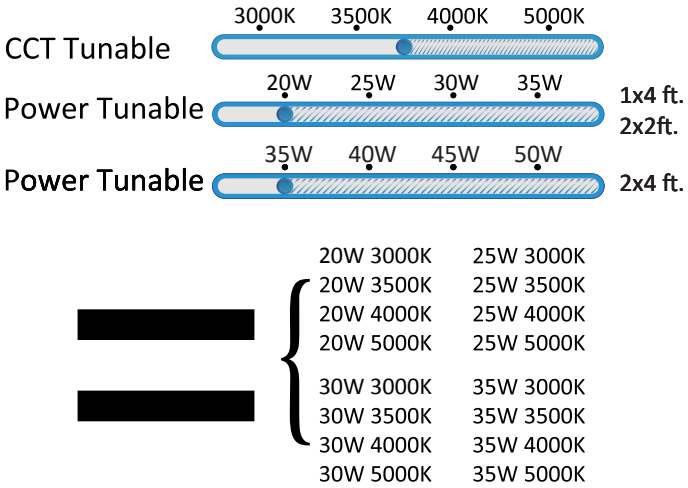

Technical Specifications:

Size	2x2 ft.	1x4 ft.	2x4 ft.
Wattage	20-25-30-35	20-25-30-35	35-40-45-50
Input Voltage	120-277V AC	120-277V AC	120-277V AC
Color Temperature	3000K/3500K/4000K/5000K	3000K/3500K/4000K/5000K	3000K/3500K/4000K/5000K
Efficacy	130 lm/W	130 lm/W	130 lm/W
Dimming	0-10V	0-10V	0-10V
CRI	>80	>80	>80
Power Factor	>0.9	>0.9	>0.9
THD	≤ 15 %	≤ 15 %	≤ 15 %
Warranty	5 years	5 years	5 years

Dimensions:

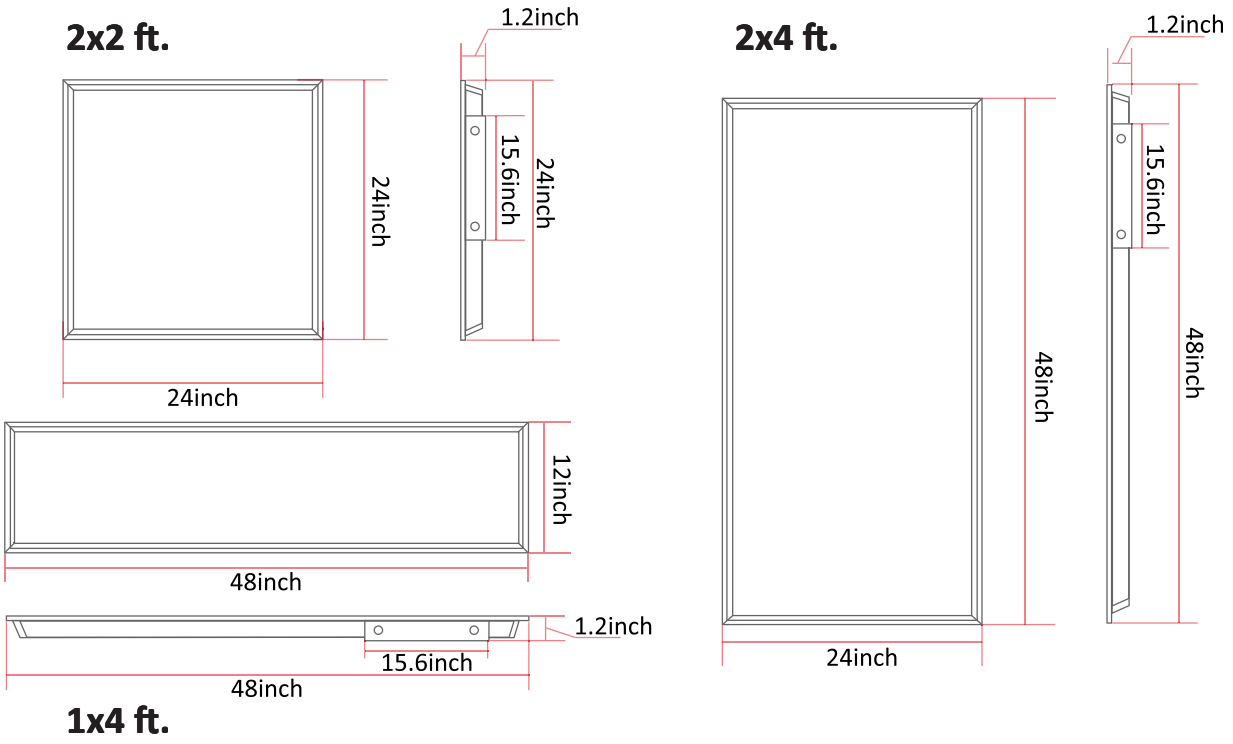

Photometric Test Report:

2ft. x 2ft.

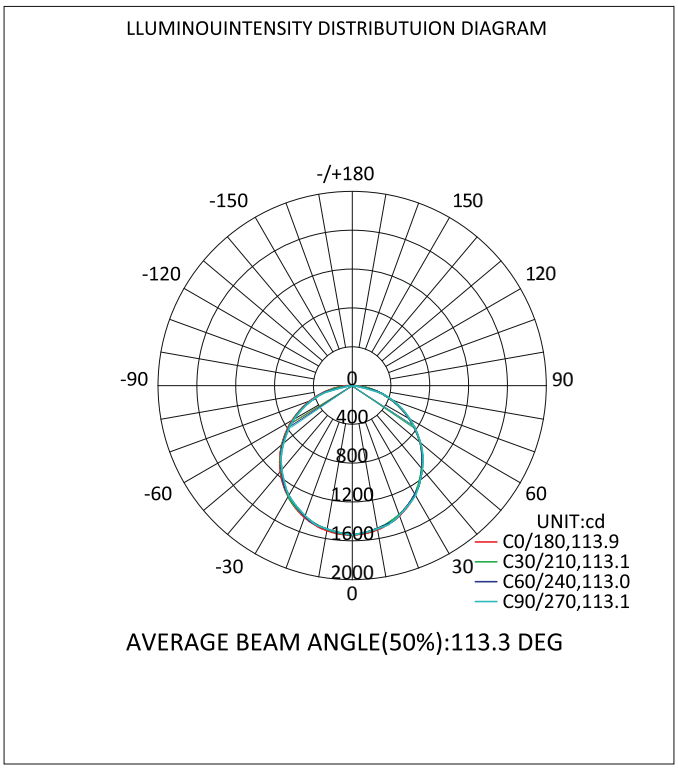

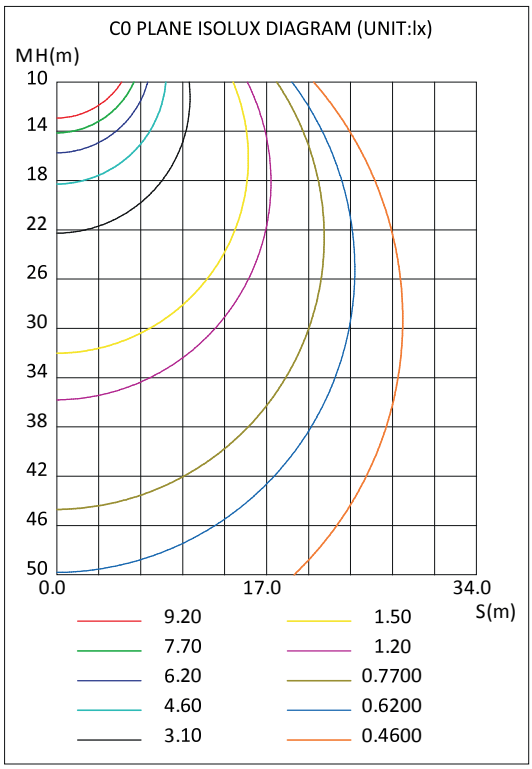

2ft. x 4ft.

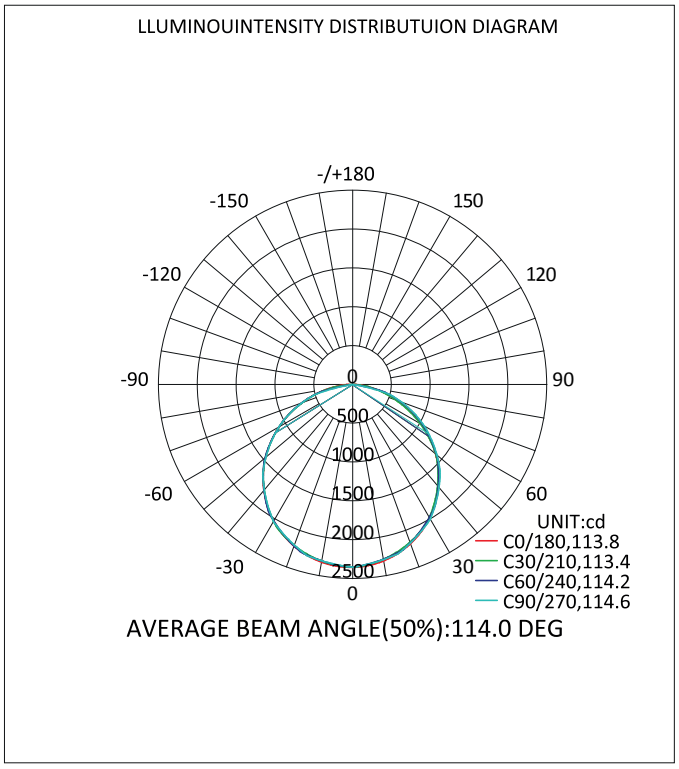

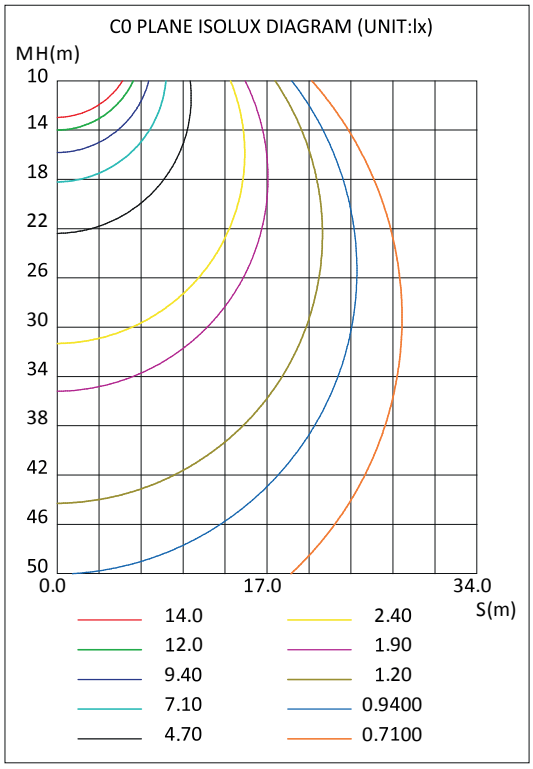

ORDERING GUIDE

Example: NUR-SLS-SJ-2X2-CCT

Fixture Type	Size	Color Temperature
NUR-SLS-SJ Backlit Panel Light	**1x4** 1x4 ft **2x2** 2x2 ft **2x4** 2x4 ft	**CCT** CCT Adjustable 3000K/3500K/4000K/5000K