

## BULLET LIGHT

### Features:

- Consumes 30W of energy to replace 100W MH
- One-piece construction.
- Rugged aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection.
- Lens: Tempered glass
- Mounting: 1/2" Knuckle Mount
- Vented housing isolates LED module from driver maximizing product life and performance.
- Lumen output from 3350lm with efficacy of 112lm/W.
- Long life LEDs lasting up to 50,000hours.
- Fixtures are IP66 rated and suitable for use in ambients from -40 °C to 50 °C(-40 °F ~ 122 °F).



### Technical Specifications:

- SKU: NUR-FL-BULLET-30W-5000K-KM
- Wattage: 30W
- Color Temperature: 5000K
- Lumens Output: 3350lm
- Efficacy: 112 lm/W
- Beam Angle: 44°
- CRI: 70
- Power Factor: 0.9





### Applications:

- Facade
- Wall Washing
- Landscape Lighting
- Poster Board Lighting
- Building Lighting




**Dimensions:**

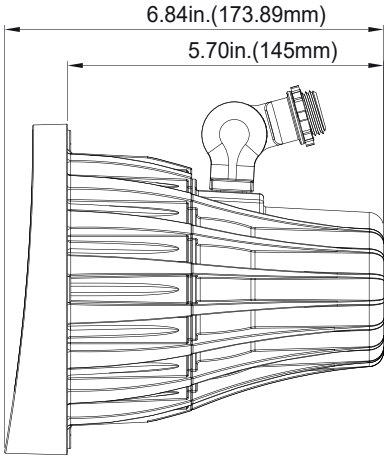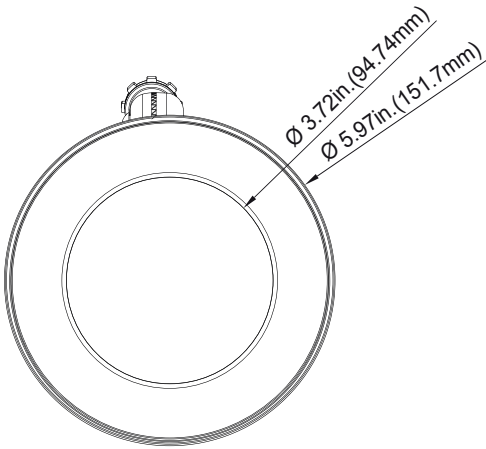


**Photometrics:**

NUR-FL-BULLET-30W-5000K-KM

Luminous Intensity Distribution Curve

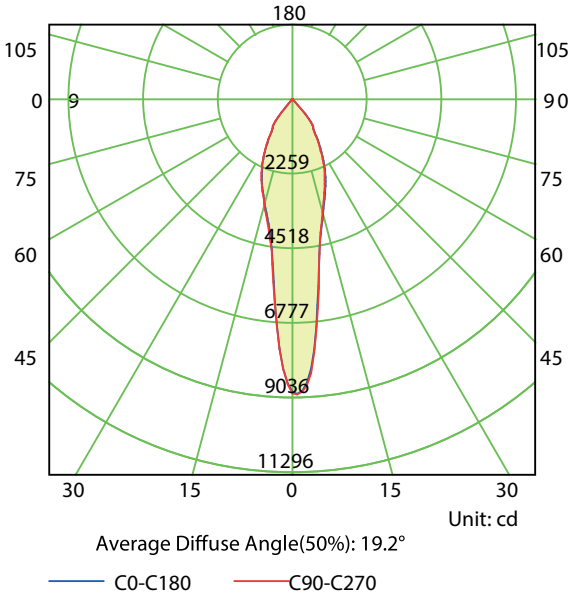

Illuminance at a Distance

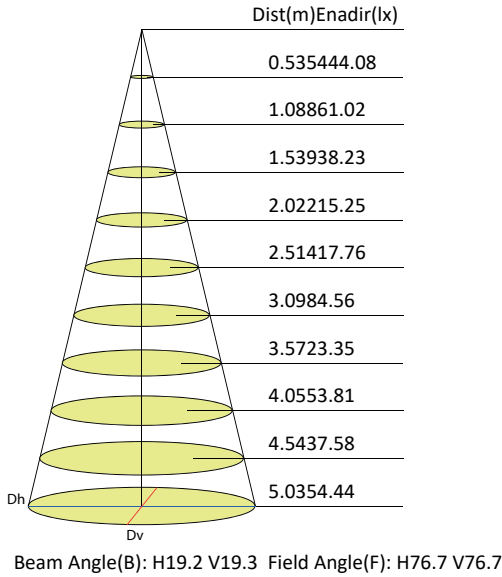

**ORDERING GUIDE**

Example: NUR-FL-BULLET-30W-5000K-KM

Fixture Type	Wattage	Color Temperature	Mount
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
FL-Bullet Flood Light	30W 30Watts	50K 5000K	KM Knuckle Mount