



Item No	NUR-T8-xxFT
Length	2', 3', 4', 5', 8'
Input Voltage	100-277VAC
Watt	2' - 9/10W    3' - 12W 4' - 12/15/18/20W    5' - 20/22/24W    8' - 36/40/50W
PF	0.9
Lumen	125 LM Per Watt
CRI	90+
Beam Angle	270degree
Led type	2835
CCT	3000/4000/5000K
Housing	Glass+PVC Film
End caps	G13
Certificate	UL DLC CE TUV SAA PSE NOM INMETRON
Weight (G)	340G

## Feature & Benefits:

1. 125-140 lumen per watt, high brightness, 12W led replace 22w Fluo 1320LM
2. Direct replacement (ballast bypass)
3. The ballast-bypass and ballast-compatible item can be used in direct-wire fixtures or to replace T8 tubes in fluorescent fixtures
4. Equipped with a film sleeve to protect its glass housing, perfect for food processing / service applications, daycare centers, elevators, and other locations that require shatterproof lighting.
5. 5 YEARS WARRANTY, universal voltage range 100-277VAC, CRI (Ra) >90, Beam Angle >280°
6. With no required ballasts and a life expectancy 5 times as long as fluorescent tubes, the LED T8 tube reduces costly repairs, disposal fees, and the need for replacements.
7. CE TUV cUL listed E467290



## Cautions

1. Installation to be performed by qualified service personnel only.
2. Installer must determine luminaire electrical rating matches the replacement lamp ratings.
3. This product is intended for dry indoor use only. Do not expose to explosive gas.
3. Do not expose wiring to sheet metal edges or other sharp objects.


## Installation Diagrams

**Always turn off the electricity supply before installation:**

1. For fluorescent lamp fixture with magnetic ballast and starter as Diagram below. No re-wiring needed. Take away the old starter, put on the led starter and LED tube as below

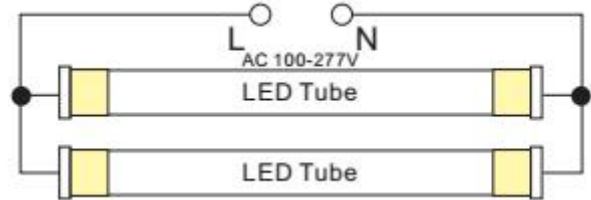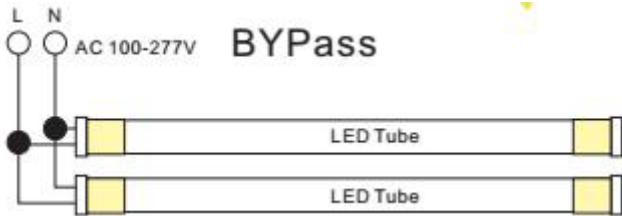

## Packaging

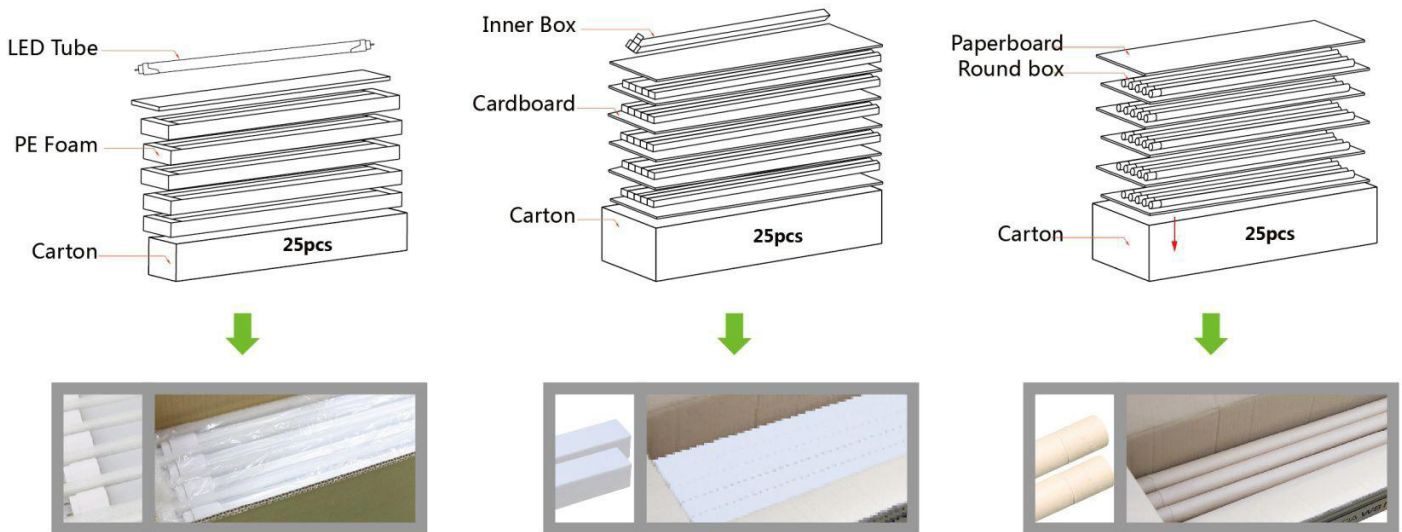

EPE + Carton

Inner Box + Carton

Round box + Carton

## Warranty

- NUR will replace all failed products due to production quality during the warranty period;
- 5 year warranty
- NUR will not be responsible for incorrect installation, user damage, or transport damage.

## Warning

- Use the product within specified voltage range
- Correct installation steps must be followed, do not touch while in operation
- Turn off power when installing and removing to avoid risk of electric shock
- Install tube in the correct size fixture
- Do not look directly at LED light source for extended period of time

## Application

- Replacement for conventional panel lights
- Hotels, Meeting Rooms, Factories, Supermarkets, Airports
- Offices, Parking Lots, Schools, Railroad Stations, etc...