

7 KEY/4 SCENE LIGHT SWITCH

Description:

This Light Switch is part of a smartphone controlled mesh network for lighting control. This is a hard wired control switch that wirelessly controls compatible light controls through a mesh network. Each device has its own address for sending, receiving, and sharing control commands through a wireless network. Expandability is easy with each device passing information to the next thus expanding the reach and control throughout the network. Admin or guest access can be shared by QR code.



Features:

- SKU: CONT-KEL-SWITCH-WP1017S
- Easy-to-use programming and commissioning process done through App.
- Bluetooth 5.0 technology enabled through network switch for reliable and secure wireless communication.
- Uses AC 120-277V with neutral wire.
- Controls up to four distinct lighting scenes that are created in App.
- Works independently without requiring a separate gateway device.
- Compatible with our Smart Network Lighting Controls.
- No internet is required.




Technical Specifications:


Input Voltage	120-277V AC
Wattage	0.07W
Frequency	50/60Hz
Control Distance	100ft Max.
Radio Frequency	2.4GHz±75MHz
Bluetooth Version	5.0
Housing Material	UL 94-5VA
Operating Temperature	32°F to 104°F (0°C to 40°C)
Storage Temperature	-22°F to 185°F (-30°C to 85°C)
IP Rating	IP20 - Indoor Use Only
Warranty	5 Years

Dimension:


Unit: Inch

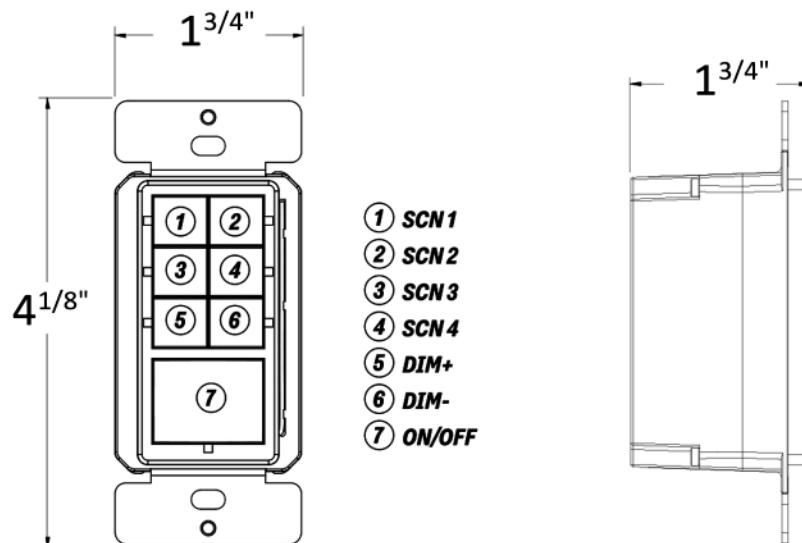

Wiring:

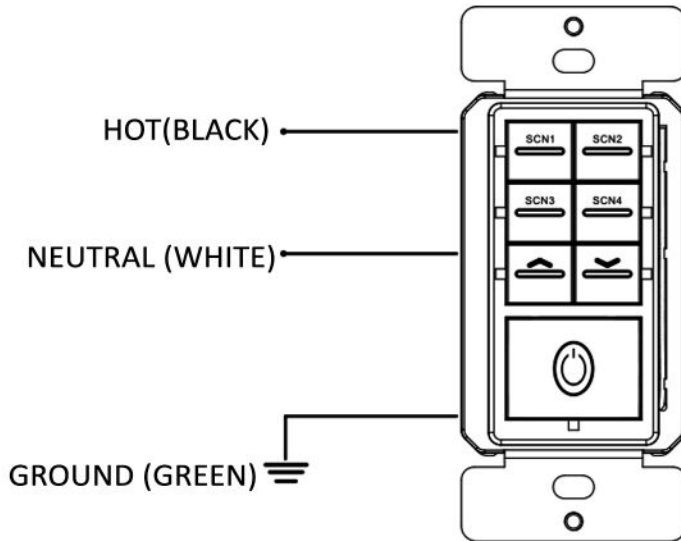

Marking:

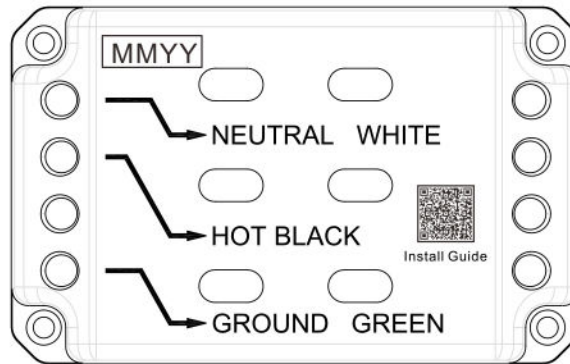

Works With:



PIR Occupancy/Daylight Harvesting Sensor
SKU: CONT-KEL-OCS-IFS105



Wireless Fixture Control
SKU: CONT-KEL-PPA102S



High Bay PIR Occupancy/Daylight Harvest Sensor
SKU: CONT-KEL-HBY-SNR-EFS106

App Download:

