

EGRESS EMERGENCY WALL PACK

Description:

This light fixture is a dual purpose: it operates as a normal dusk-to-dawn light utilizing its photocell, and also has a battery backup that provides 90 minutes of emergency of operation if power fails at any time. This fixture meets ADA requirements with it's low profile form factor.



Features:

- Die-cast aluminum housing
- Polycarbonate lens and mirror reflector
- UL-94V-0 flame rating, fire-resistant
- Power consumption: 4.8W max
- 4.8V 1800mAh Nickel Cadmium Battery
- Overcharge & Over-discharge protection




Special Functions:



- When the power supply system is out of power, the lamps start the emergency system to turn on the lights, and the duration can be up to 90 minutes.
- The lamp has a light-sensing function, when the light < 3FC lamps are automatically turned on, and the light > 3FC lamps are automatically turned off.

Technical Specifications:

Input Voltage	120-277V AC	
Wattage	12W	
Color Temperature	5000K	
Efficiency	100LM/W	
CRI	>72	
Light Efficiency	87D	
Lumens	General Mode	Emergency Mode
	956LM	433LM
Backup time	≥90minutes	
Charging time	24 hours	
Conversion time	<0.2 second	
IP Rating	IP65	

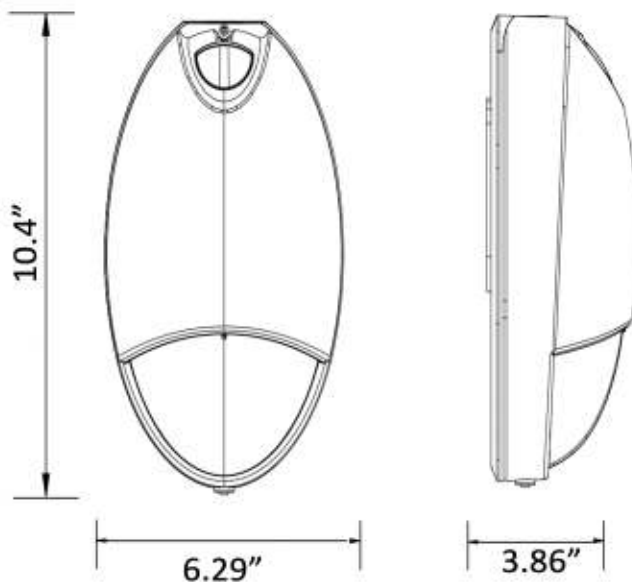Dimensions:

Photometry:

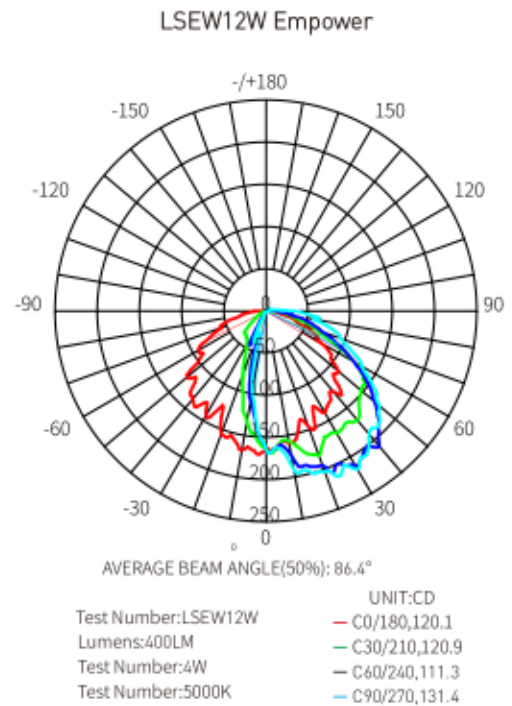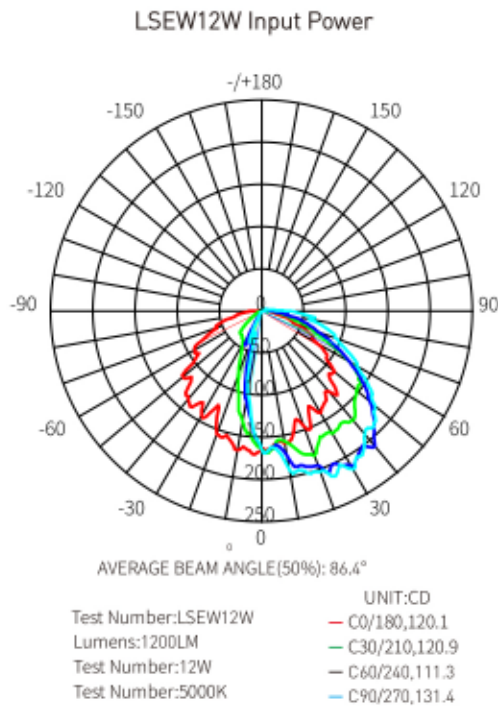

Ordering Guide:

Example: NUR-EM-WM-12W-50K

Brand	Emergency	Wall Mount	Wattage	Color Temperature
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
NUR	EM	WM	12W	5000K